



Digitizer and Interface Connection

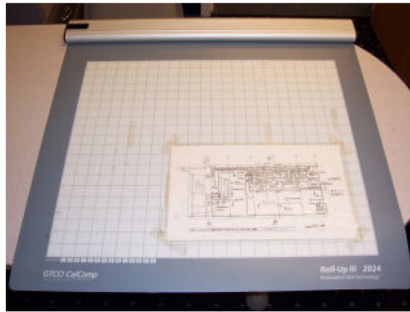

In this tutorial you will learn how to connect your digitizer devices. Following are all the components you will need:

Rollup Digitizer



Smart Menu Interface Module



Interface Linkage Cable



Stylus Pen



Smart Menu




Data Cable




2 Power Cords




First connect the Stylus Pen to the Digitizer.
This is the jack where the Stylus Pen plugs in.

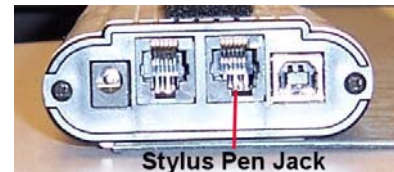



Next you will want to connect the Smart Menu Interface Module to the Rollup Digitizer with the Interface Linkage Cable. Here is where the cable plugs into the interface module.





And this is where the cable plugs in to the Digitizer.

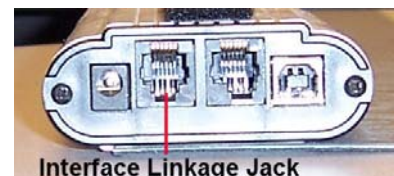

Now you will want to connect your Smart Menu to the Interface Module. This is the plug on the interface module that you should connect to.




Next you will connect the Data Cable to the Interface Module then to the Computer. This shows the plug on the Interface Module.





Now you can connect to the computer at this port.



Now with all the devices connected you can plug in the power cables. First is the Digitizer Power Cable. Here is the port on the Digitizer where the power cable connects.

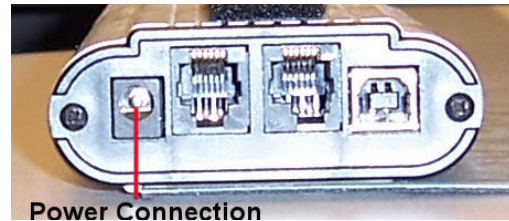

Next connect the Interface Module Power Cable to this port on the Interface Module.



With all components connected you will need to program your Digitizer. In the lower left corner you will see a row of numbers. With the Stylus Pen press S, 4, 2, then the Speaker Button. When this is done you should hear several beeps and your Rollup Digitizer is ready for use.

